SUPPORTI / *CASTORS*



38



38A



38B



38BIS



38BISB

Pesante / *Heavy duty*

Ruota in poliuretano, nucleo in alluminio
Polyurethane wheel tread, aluminium centre



150 ÷ 800 -20 ÷ +80

Supporti tipo pesante in acciaio stampato zinco-cromato, di forte spessore, rotanti su doppia corona di sfere alloggiate in ralle d'acciaio temprato. Assemblaggio con dado autobloccante.

Heavy duty castors in zinc-chromium plated pressed steel, high thickness, turning on double rim of balls fitted in hardening steel thrust-bearings. Assembled with self locking nut.

Accessori a richiesta: perni filettati e cilindrici di varie dimensioni. Cuscinetti a sfere 2RS a tenuta stagna o SKF.
On request: threaded pin fitting and round stem fitting with various dimensions 2RS. Waterproof or SKF ball bearings.

Le ruote 18AH e 18AW possono essere assemblate con tutti i supporti tipo pesante.
Wheels 18AH and 18AW can be assembled with all heavy duty castors.

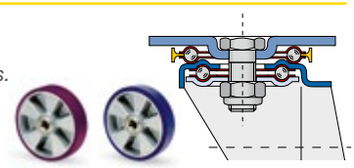

								daN Dynamic	daN Static
80x25	100x85	80x60	9x12	36	118	114	22x50	150	190
100x30	100x85	80x60	9x12	36	135	131	22x50	200	250
100x40	100x85	80x60	9x12	36	135	131	22x50	250	320
125x30	135x110	105x80	13x16	45	166	161	22x50	250	320
125x40	135x110	105x80	13x16	45	166	161	22x50	300	380
150x40	135x110	105x80	13x16	50	189	184	22x50	400	500
160x50	135x110	105x80	13x16	57	216	209	22x50	500	630
175x50	135x110	105x80	13x16	57	238	231	25x65	600	750
180x50	135x110	105x80	13x16	57	241	234	25x65	700	880
200x50	135x110	105x80	13x16	57	251	244	25x65	800	1000
250x50	135x110	105x80	13x16	74	300	-	-	800	1000